### **Bed Throw**

### Facilities using this Pattern are:

# Minneapolis, and Sioux Falls VAHCS; Montevideo & Preston Vets Home

(as always contact facility to be sure they are in need before spending your \$\$ and time)

#### Needed:

4 ¾ total yards washable Quilting cotton fabric enough to cut 42 10x10 inch squares Patriotic or appropriate fabric 5 yards washable Quilting cotton or flannel for back should be 65x 75 inches

 $\frac{3}{4}$  Yard Washable fabric for binding to be cut in 2  $\frac{1}{4}$  inch lengths stitched together to go around quilt. Cotton batting

Fabric scissors or rotary cutter

Thread


Sewing machine


1/4-inch seam allowance for seams unless noted

Finished Should be 60x70 inches

### Cut from Fabric:

- 1. Cut 42 10x10 inches squares (Main body). (See A)
- 2. Stitch squares together with right sides facing together.
- 3. Press seams to one side.
- 4. Make 7 rows of 6 squares each. (see B)
- 5. With right sides together stitch the rows together. Press.
- 6. Make a sandwich of the top, batting and backing. (Backing face down; batting, top face up)
- 7. Quilt or tie in all corners to hold sandwich together.
- 8. Add the binding. (See C) Here is a video on how to bind your quilt in six easy steps. https://www.youtube.com/watch?v=xWh90tXr7g4
- 9. If backing is large enough you can fold over to make the binding.

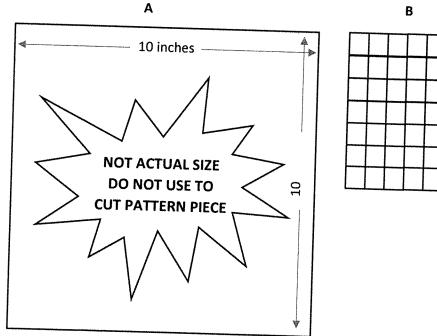



## **Children's Activity Bag**

### Facilities using this Pattern are:

## Minneapolis VAHCS; Montevideo, Preston and Silver Bay Vets Home

(as always contact facility to be sure they are in need before spending your \$\$ and time)

Needed:

½ yard of Fabric or Felt 18x36 inches

Fabric scissors or rotary cutter

Thread

Sewing machine

1/4-inch seam allowance for seams unless noted

Finished will be approximately 11 1/2x14 inches

To make the drawstring bag see directions for the *Tote bag Pattern #14-2021* ◆





Cut from Fabric/Felt:

- 1. Cut 1 12x30 inches
- 2. Cut 2 4x18 inches
- 3. Fold 12x30 inches in half (measures 12x15 inches)
- 4. With right sides together stitch Side seams using ¼ inch seam allowance. Serger may be used.
- 5. Turn right side out and press.

Strap handles:

- 6. On wrong side of the 4-inch strip mark center of fabric (long edge)
- 7. Fold both edges to center of fabric and press (See A & B below)
- 8. Fold in half and press (will now look like bias binding).
- 9. Top stitch 1/8 inch around the strap handle
- 10. Repeat 6-9 for 2<sup>nd</sup> strap handle

Attach Handles and finish Bag:

- 11. Place one end of strap handle at the top of bag 2 inches from side seam and pin in place. Repeat for the other end of strap handle being careful not to twist the handle. (See C below)
- 12. You can flip the bag over and match up the handles to the first side.
- 13. Zigzag or serge ¼ inch around the top of the bag. Okay to stitch if you do not have zigzag on your machine
- 14. Turn top down ¾ inch. Press and pin in pace
- 15. Top stitch ¼ inch around the top of the bag which will hold the straps in place. (See D below)

To give bag a more finished look you can zigzag the side seams to keep from fraying. To make the handles more secure I do another line of stitching ½ from top.





C





**Children's Activity Bag Items** 

### **PATTERN #2-2021**

Here are some suggestions of activities that can be put together for distribution to children in our busier clinics. Fill you bags with some or all the items listed. NOTE: Please do not include small items or pieces that can be swallowed.

- Small mini books
- Stickers
- Word search pages/books for children
- Dot-to-dot puzzles
- Foam shapes (self-adhesive)
- Notebook or paper for the shapes and stickers
- Coloring pages or coloring book
- Non-toxic crayons
- Lacing cards
- Homemade mini felt board with shapes or face parts
- Ziploc bags (sandwich size)

### **Comfort Boxes**

### Facilities using this Pattern are: Bemidji, Montevideo & Preston Vets Home

(as always contact facility to be sure they are in need before spending your \$\$ and time)

Use plastic school boxes with the following items enclosed:

- Notepad with pen
- Toothbrush and Toothpaste
- Lotion and Shampoo (small size)
- Comb and Brush
- Chapstick plain (not flavored)
- Deck of Playing Cards
- Unisex Deodorant
- Chapstick

### **Coverups**

(formerly called bibs)

Facilities using this Pattern are:

### St. Cloud VAHCS; and Silver Bay Vets Home

(as always contact facility to be sure they are in need before spending your \$\$ and time)

#### Needed:

1 Bath Size towel

Bias tape

Fabric scissors or rotary cutter


**Thread** 

Sewing machine


Finished size is 27x40 inches




- 1. Attach the patterns pieces together.
- 2. Fold Towel in half lengthwise.
- 3. Cut towel from the top edge so it measures 40 1/2 inches
- 4. Place pattern on fold.
- 5. Cut out circle.
- 6. Cut a slit on fold from top edge to circle.
- 7. Turn "slit" edges ½ inch and sew (no bias on these edges).
- 8. Sew bias tape around the circle only.





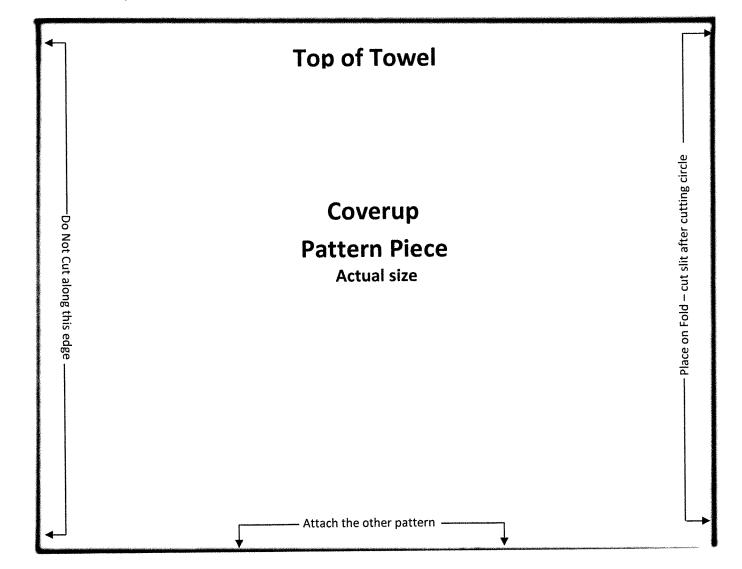

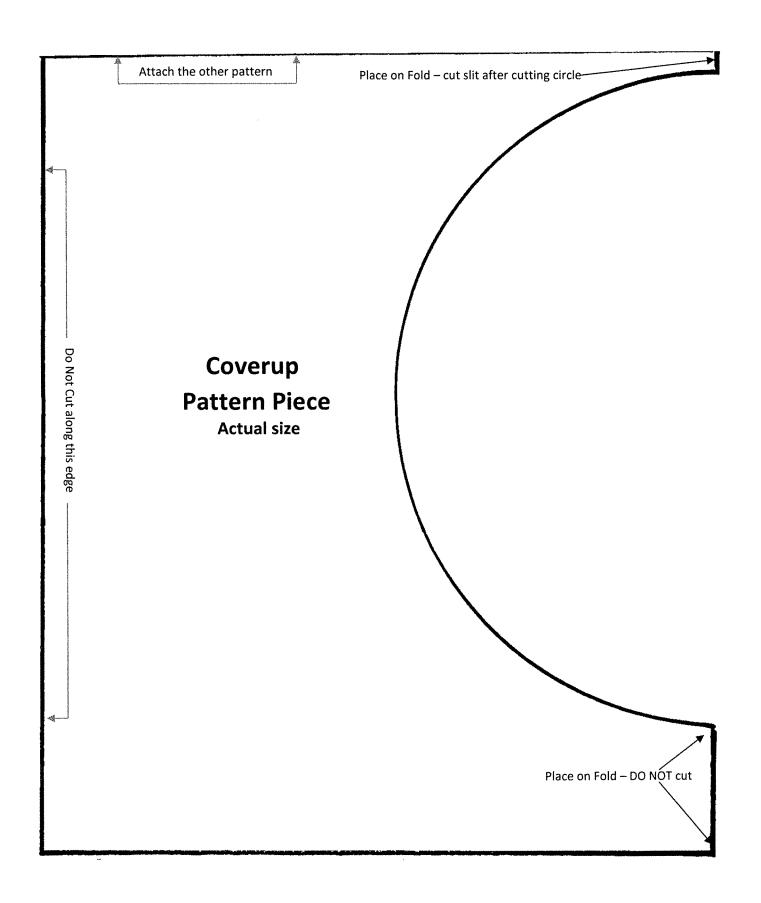

### **Heart Pillow**

#### Facilities using this Pattern are:

### Minneapolis VAHCS

(as always contact facility to be sure they are in need before spending your \$\$ and time)

#### Needed:

3/4 yard of Fabric plus ¾ yard of contrasting (Total 1 ½ yards of fabric)

Polyester Fiberfill


Thread Needle to hand stitch closing

Sewing machine


14-inch seam allowance for seams unless noted

Finished size is approximately 18x18 inches

- 1. Attach pattern pieces together. Arrows do not match up. (see photo below)
- 2. Cut 1 from fabric plus Cut 1 from contrasting fabric (Cut 2 total)

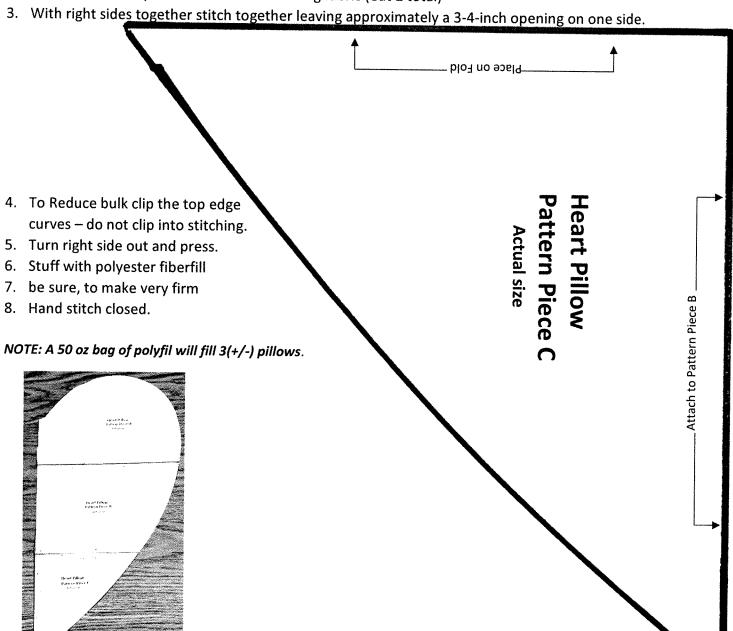



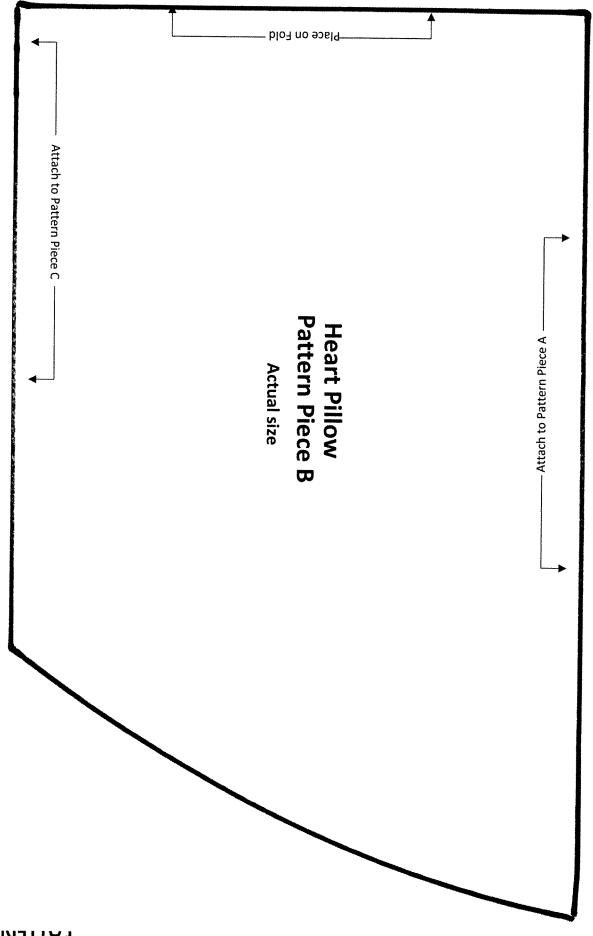

### **Laundry Bags**

#### Facilities using this Pattern are:

### St. Cloud VAHCS; Bemidji Veterans Home


(as always contact facility to be sure they are in need before spending your \$\$ and time)

#### Needed:


- 1 ¾ yard of denim or similar sturdy fabric
- ¼ yard of cotton fabric for drawstring casing (If made from denim they are too hard close)
- Parachute cord or similar for drawstrings. Parachute cord may be purchased at Menards, Amazon, Lowes, and some craft stores. (<u>Do not</u> use yarn)
- Fabric scissors or rotary cutter
- Thread
- Sewing machine
- 3/8 seam allowance unless noted

Finished bag should measure approximately 28x38 inches

- 1. Cut 2 pieces of denim fabric 29x40 inches
- 2. Cut 4 drawstring casing pieces of cotton fabric 2 ¾ inches x 28 inches
- 3. With right sides together sew the bottom and side seams. Serge or zigzag top (open end) to avoid fraying. Or you may also turn under ¼ inch and stitch.
- 4. Turn bag right side out and press.
- 5. Next take drawstring casing pieces and with right sides together sew a 3/8 inch seam across both short ends. Repeat using the other 2 drawstring casing pieces. This will make the drawstring casings. Turn right side out and press.
- 6. Fold the drawstring casings in half vertically so the long raw edges meet and baste in place.



- 7. Mark the center along the bottom raw edge. Mark center of bag on top raw edge of bag.
- 8. Match the raw edge centers of bag and casing. Pin the casing in place then stitch onto the bag at ¼ inch using a zigzag stitch or serger sewing machine. (See A below)
- 9. Fold the top of the bag down ¾ inch and pin in place. Top stitch the bag at ½ inch and ¼ inch. It will hold the casing securely in place. (See B below)
- 10. Repeat 5-9 for the drawstring casing on the second side.
- 11. Add the parachute cord (drawstrings); be sure that it draws from each side. Tie the cords on each side together to prevent them from slipping out of the casing.



### **Neck Pillow**

#### **Facilities using this Pattern are:**

### Minneapolis, and St Cloud VAHCS – Montevideo and Preston Vets Home

(as always contact facility to be sure they are in need before spending your \$\$ and time)

#### Needed:

½ yard of Fabric plus ½ yard of contrasting fabric or 2 pieces 18x20-inches

**Polyester Fiberfill** 

Thread Needle to hand stitch closing


Sewing machine

3/8-inch seam allowance for seams unless noted


You may watch this video for reference: https://www.youtube.com/watch?v=feGTn58jcBM

- 1. Cut 1 from fabric
- 2. Cut 1 from contrasting fabric
- 3. With right sides together stitch together leaving approximately a 5-inch opening at top.

Directions continued next page

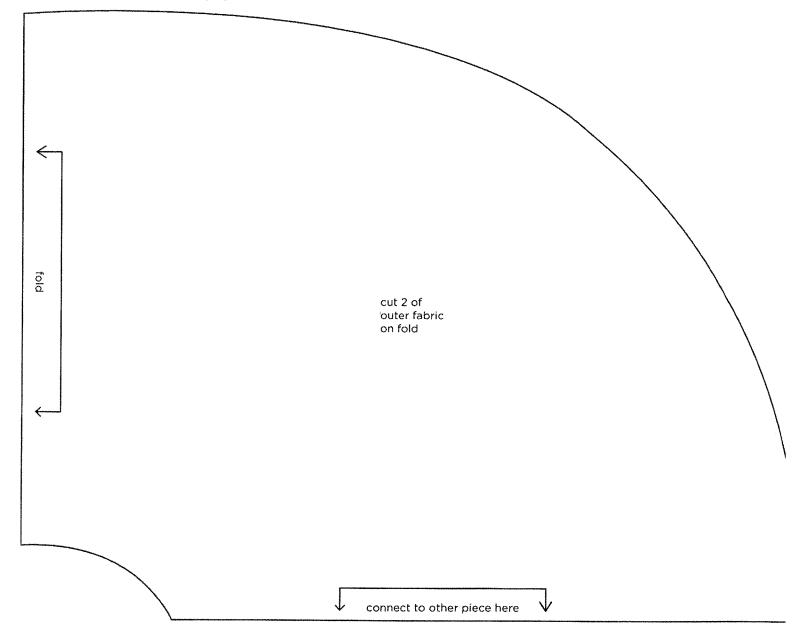

- 4. Clip inside curve (around neck) being careful not to clip into your stitching.
- 5. Stitch inside curve (around the neck) again to reinforce.
- 6. Turn right side out and press.
- 7. Stuff with polyester fiberfill be sure to make *very* firm
- 8. Hand stitch closed.

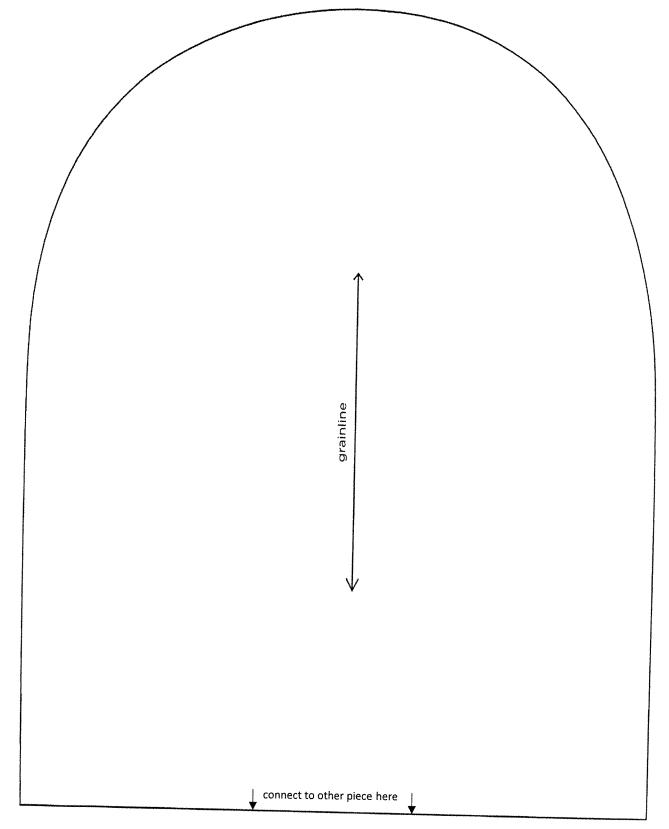

### No Sew Fleece Poncho


### Facilities using this Pattern are:


St. Cloud VAHCS, Bemidji, Silver Bay, Minneapolis, Montevideo and Preston Veterans Homes (as always contact facility to be sure they are in need before spending your \$\$ and time)

#### Needed:


2 yards of Fleece fabric (appropriate design – the majority of veterans are male) Fabric scissors

- 1. Trim off both selvage edges.
- 2. Lay fabric so the short edge is at the top. (See A below)
- 3. Fold the top edge of the fabric down 22 inches. (See B below)





- 4. Fold fabric in half with long edges together.
- 5. Mark center with a pin and lay flat again as in Diagram B.
- 6. Place/pin pattern piece on the fold matching the center of the pattern piece to the center of the fabric. This will seem like a small opening, but it is plenty of room and the fleece stretches slightly to allow to place over head.
- 7. Cut the pattern piece out of the fabric.
- 8. You are done.

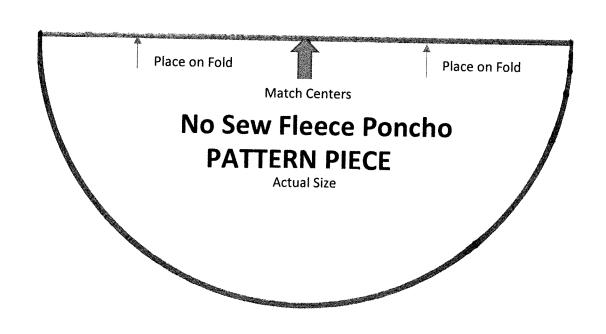

### **Port Pillow**

### Facilities using this Pattern are: Minneapolis VAHCS

(as always contact facility to be sure they are in need before spending your \$\$ and time)

#### Needed:

Quilting weight cotton or a fat quarter (A fat quarter measures 18x20 inches and will make 2 pillows)

Polyester fiber fill

Fabric scissors

Thread

Needle for hand stitching pillow closed

Sewing machine

Snaps or hook and loop (i.e. Velcro) ¾ inch x 1 inch


(2) 3/x1 inch for heart shaped pillow

1/4-inch seam allowance for seams unless noted

Finished will be approximately 6x6 inches

- 1. Cut  $2 6 \frac{1}{4} \times 6 \frac{1}{4}$ -inch squares
- 2. Cut 1 4 x8-inch Strip of fabric
- 3. 1% inches from one side of one square mark for the placement of snap/Velcro (I try to center the strap on the pillow)
- 4. Attach hook and loop or snap (reinforce with 1-2 small squares of fabric if using a snap)
- 5. On wrong side of the 4-inch strip mark center of fabric (long edge)
- 6. Fold over ¼-inch on one end and press.
- 7. Fold both edges to center of fabric and press (See A below)
- 8. If using hook and loop attach ½ inch from top of strap on half of strap;(See B). if using a snap, see #11
- 9. Fold in half and press (will now look like bias binding)
- 10. Top stitch 1/8 inch along 3 sides bottom edge will be sewn into seam
- 11. If using snaps attach the top of the snap  $\frac{1}{2}$  inch from top edge
- 12. Hook the strap to the hook and loop or snap on the square. (See C below)
  - a. By hooking the strap to the square, it will lineup perfectly when completed
- 13. With right sides together stitch around the square leaving a 2-3-inch opening for turning and inserting fiberfill.
- 14. Press back seam allowance on open side for hand stitching and trim strap and corners close to stitching. (See D below)
- 15. Turn right side out and press. (for easier turning unhook strap)
- 16. Fill with polyester fiberfill (be sure to get plenty in to protect the port).
- 17. Using a slip stitch, hand stitch the pillow closed.

Α




В



C



D



- 1. Cut 2 from Pattern Pieces main fabric
- 2. Cut 1 4 x6 -inch Strip of fabric
- 3. On wrong side of the 4-inch strip mark center of fabric (long edge)
- 4. Fold over ¼-inch on both ends and press.
- 5. Fold both edges to center of fabric and press (See A on previous page)
- 6. Add Velcro/snaps to both ends of strap on one side of heart fabric. (see B on previous page)
  - a. OR, you may stitch one end of strap to heart piece.
- 7. Add Velcro pieces/snaps to heart see below
- 8. With right sides together stitch heart together leaving 2-3-inch side opening
- 9. Clip top curve to make easier turning. Do not cut stitching.
- 10. Turn right side out and press.
- 11. Fill pillow with polyester fiber fill. Be sure that the pillow is firm.
- 12. Hand stitch opening closed. **PATTERN PIECE Actual Size** Strap not leave other between allows to the triples and stuffing actual size **PORT PILLOW**

### **QUILTS**

#### Facilities using this Pattern are: See below

(as always contact facility to be sure they are in need before spending your \$\$ and time)

There are no step-by-step instructions included for Quilts. There are so many wonderful patterns. Pick one you like and make it. Something patriotic is always appreciated by the veterans.

Note: Twin and ¾ size quilts are both 70x90 inches.

### 70x90 INCH QUILTS:

Fargo VAHCS, St. Cloud VAHCS, Minneapolis VAHCS, and Sioux Falls VAHCS

Luverne, Fergus Falls, Silver Bay, Hastings, and Minneapolis Veterans Homes

### **Tote Bag**

### Facilities using this Pattern are:

### St. Cloud and Sioux Falls VAHCS, Bemidji, Montevideo and Preston Vets Home

(as always contact facility to be sure they are in need before spending your \$\$ and time)


#### Needed:


- Fabric 13x35 inches
- Paracord or similar for drawstrings.
  - o Paracord may be purchased at Menards, Amazon, Lowes, and some craft stores. (Do not use yarn)
- 1/2-inch seam allowance unless noted.
- Video for casing and bag
  - https://www.youtube.com/watch?v=0OuhGPFVIro

Finished bag should measure approximately 12x15 inches



- 1. Cut 1 piece of fabric 13x35 inches. (You may use pinking shears to help prevent fraying).
- 2. Drawstrings should be 48 inches in length each. Need 2.
- 3. Fold fabric in half. (Now will measure 13x17 1/2 inches)
- 4. With right sides together sew the side seams. Leave an opening large enough for 2 drawstrings when stitching the side seams shut. (see A below)
  - a. Stitch down 1 ¼ inch. Leave opening of 1 ¼ inch
- 5. Press side seams open approximately 5-6 inches from top.
- 6. Fold top down ¼ inch and press. (If you wish you may stitch this in place)
- 7. On the top, fold down 1 1/4 inch. Press and pin in place.
- 8. Stitch approximately 1 1/8 inch from the top edge along the bottom folded edge of the casing as shown in B below.
- 9. Turn bag right side out and press
- 10. Top stitch at ¼ inch around the top of the bag
- 11. Insert the 2 drawstrings: feed one from each side.
  - a. Tie the drawstrings on each side together to prevent them from slipping out of the casing.
  - b. When using a poly type cord, use a lighter or match to melt the tips slightly to keep from fraying.
  - c. It is helpful to make the drawstrings long enough so that the bag may be carried over the shoulder.
  - d. DO NOT use yarn for the drawstring









Place on Fold

## **Urine Bag Cover**

### Facilities using this Pattern are:

### Bemidji Vets Home

(as always contact facility to be sure they are in need before spending your \$\$ and time)


#### Needed:


2 Pieces 18x20 inches of Fabric – suggested fabric is waterproof or water-resistant canvas

1/4-inch seam allowance for seams unless noted Finished will be approximately 15x18 inches Clips such as hair clips from Walmart

**DO NOT** use pins on the waterproof/water-resistant, they put holes in fabric that defeats the Waterproof.

- 1. Attach pattern pieces as marked. (See A)
- 2. Cut 2 pattern pieces (Main body) Trace the pattern on the fabric and cut. (See B)
- 3. If fabric frays, turn over ¼ inch and stitch; or serge edge; or serge edge on top.
- 4. Fold Top down as shown on pattern. (See C)
- 5. With right sides together stitch around both sides of the bag. Leave top open.
- 6. Turn right side out. Finger press only; hot iron will melt waterproof fabric.

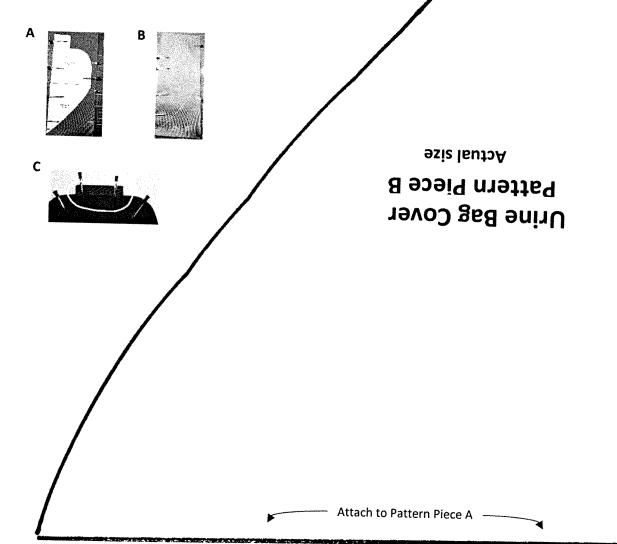

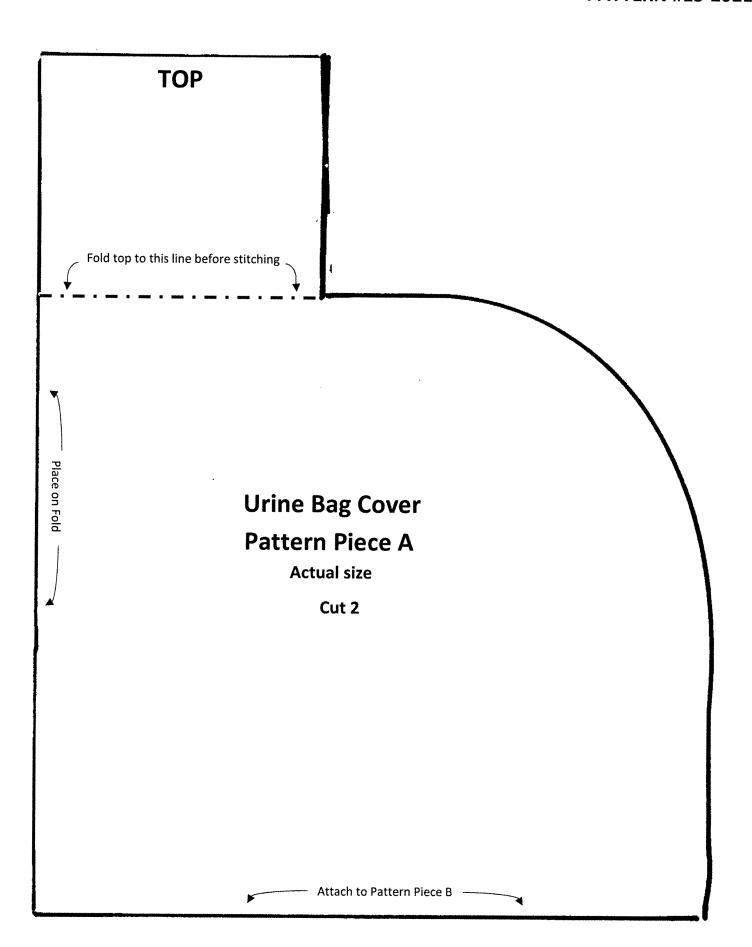

### Wheelchair/Walker Bag

## Facilities using this Pattern are: St. Cloud VAHCS

### Bemidji, Minneapolis, Montevideo and Preston Veterans Home

(as always contact facility to be sure they are in need before spending your \$\$ and time)

#### Needed:

- 1 yard of sturdy fabric
- Optional: 1 yard of cotton or similar fabric for inside lining
- Paracord or Bias tape for ties (or make your own bias tape)
  - Paracord may be purchased at Menards, Amazon, Lowes, and some craft stores. (<u>Do not</u> use yarn)
- Velcro if making straps 2 piecies ¾x1 inch. Snaps may also be used.
- 1/4-inch seam allowance unless noted.
- Optional: Slip pockets are a nice addition to the bag (tip: add to bag before stitching side seams) Here is a video you can watch to make a slip pocket: <a href="https://www.youtube.com/watch?v=9lCkCJAxiQ4">https://www.youtube.com/watch?v=9lCkCJAxiQ4</a>

Finished bag should measure approximately 20x16 inches

#### Note: A, B, and C are shown without the optional lining.

- 1. Cut 2- 4x18 inch pieces of fabric for straps and Velcro *OR* Cut four 2x18 inch for ties 1/2-inch bias tape may be used or the Paracord.
- 2. Cut 1 piece of fabric 22x36 inches.
- 3. Fold fabric in half. (Now will measure 22x18 inches) See A Below.
- 4. With right sides together sew the side seams.
- 5. Fold top down 1/2 inch and press
- 6. Turn bag right side out and press (Do not turn optional inside lining right side out)

#### If adding optional inside lining, go to Step 9.

- 7. On the top, fold down 1 inch. Press and pin in place.
- 8. Stitch approximately 3/4 inch from the top edge along the bottom folded edge. See B below.
- 9. Add ties, straps. Stitch a square and X to reinforce straps. Do not add straps to lining. See C below
- 10. Top stitch at ¼ inch at the top of bag if not adding optional lining

#### 11. Optional Inside Lining repeat steps 2-6.

- 12. Insert lining into bag with wrong sides together. Match side seams and pin in place.
- 13. Top stitch bag and lining at 1/4 inch from top of bag.

#### Strap/Tie handles: (or Paracord may be used)

- 14. On wrong side of the 4-inch (or 2 inch) pieces mark center of fabric (long edge)
- 15. For ties and Velcro: On both short edges fold ¼ inch on one end and press.
- 16. Fold both edges to center of fabric and press (See D & E below)
- 17. Fold in half and press (will now look like bias binding).
- 18. Top stitch 1/8 inch around the strap handle
- 19. Add Velcro. To reinforce use the box and X method shown in C.
- 20. Attach straps/ties as shown by folding in half and attach at the side seams. in C below.
- 21. Repeat 13-20 for remaining strap handles/ties.

